


Turned Eye Bolts

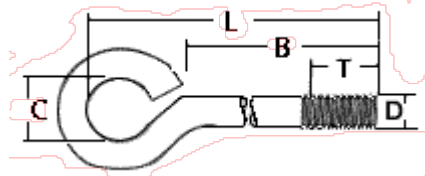

Plain = IT020----- Zinc = IT020-----Z1 Galvanized = IT020-----GD

DIMENSIONS ARE IN INCHES					MAX. LOAD In Lbs.
D	B	C	L	T	
1/8 (6-32)	3/4	1/4	1-1/4	5/8	22
5/32 (8-32)	1-1/8	1/4	1-11/16	1	36
3/16 (10-24)	1	3/8	1-11/16	7/8	38
3/16	1-3/8	5/16	2	1-1/4	38
3/16	2	3/8	2-11/16	1	38
3/16	3	3/8	3-11/16	1-1/2	38
7/32 (12-24)	1-1/2	3/8	2-1/4	1-3/8	52
1/4-20	1	1/2	2	7/8	74
1/4-20	1-1/2	1/2	2-1/2	1-1/4	74
1/4-20	1-7/8	7/16	2-3/4	1-5/8	74
1/4-20	2	1/2	3	1-1/4	74
1/4-20	2-1/5	1/2	3-1/2	1-1/4	74
1/4-20	3	1/2	4	1-1/2	74
1/4-20	3-1/2	1/2	4-1/2	2	74
1/4-20	4	1/2	5	2-1/2	74
1/4-20	5	1/2	6	3	74
1/4-20	6	1/2	7	4	74
5/16-18	1	5/8	2-1/8	7/8	96
5/16-18	2	5/8	3-1/8	1-1/4	96
5/16-18	2-1/4	9/16	3-3/8	2	96
5/16-18	2-1/2	5/8	3-5/8	1-1/4	96
5/16-18	3	5/8	4-1/8	1-1/2	96
5/16-18	3-1/2	5/8	4-5/8	2	96
5/16-18	4	5/8	5-1/8	2-1/2	96
5/16-18	5	5/8	6-1/8	3	96
5/16-18	6	5/8	7-1/8	4	96
5/16-18	6-1/2	7/8	7-3/4	4	96
3/8-16	1	3/4	2-1/2	7/8	144
3/8-16	2	3/4	3-1/2	1-1/4	144
3/8-16	2-1/2	21/32	3-3/4	2-1/4	144
3/8-16	2-1/2	3/4	4	1-1/2	144
3/8-16	3	3/4	4-1/2	1-1/2	144
3/8-16	3-1/2	3/4	5	2	144
3/8-16	4	3/4	5-1/2	2-1/2	144
3/8-16	5	3/4	6-1/2	3	144
3/8-16	6	3/4	7-1/2	4	144
3/8-16	8	3/4	9-1/2	4	144
3/8-16	10	3/4	11-1/2	4	144
3/8-16	12	3/4	13-1/2	4	144
7/16-14	6	7/8	7-3/4	4	216
7/16-14	8	7/8	9-3/4	4	216
1/2-13	2	1	4	1-1/2	298
1/2-13	4	1	6	2-1/2	298
1/2-13	6	1	8	4	298
1/2-13	8	1	10	4	298
1/2-13	10	1	12	4	298